

XE75GA



更节能环保



更高效回报



更可靠耐用



更舒适安全

PT. Perkasa Indo Jaya Mandiri

Jl. Lingkar Luar Barat, Golf Lake Residence RKPA 65,
Cengkareng, Jakarta Barat 11730

+6221 2952 6678

info@pijm.co.id



PT. Perkasa Indo Jaya Mandiri

+62 811 300 101

pijm.id

www.pijm.co.id

整体概述

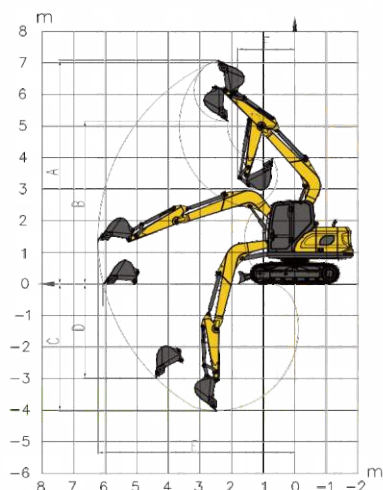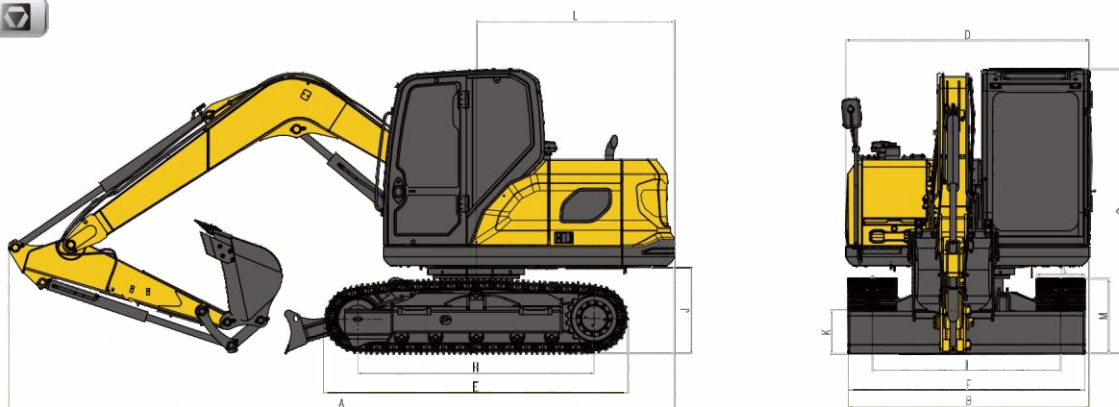

Appearance size

Unit: mm

A Overall length	6185
B overall width	2265
C Overall height	2645
D Turntable width	2260
E track length	2825
F chassis overall width	2250
G Tumbler distance	450
H Track wheelbase	2195
I Track Width	1800
J counterweight ground clearance	813
K minimum ground clearance	385
L Minimum tail swing radius	1840
M Track height	696

Working scope

Unit: mm

A Max digging height	7085
B Max dumping height	5160
C Max digging depth	4020
D Max vertical depth	2960
E Max digging reach	6260
F Mini swing radius	1818
Dozer blade lifts maximum ground clearance	440
Maxi dozer cutting depth	445

Equipment

Standard	Boom /mm	3720
	Arm /mm	1622
Optional	Boom /mm	/
	Arm /mm	/
	Bucket /m ³	0.18~0.35

Model

XE75GA

Weight /kg	7700
Bucket /m ³	0.33

Engine

Model	YANMAR V2607
Direct injection	✓
Four strokes	✓
Water cooled	✓
Turbocharged	✓
Air to air intercooler	/
Number of cylinders	4
Power/speed/kW/rpm	36/2000kW/rpm
Max Tor/speed/N·m/rpm	206.9N·m/1100-1500rpm
Displacement/L	2.615L

Oil Capacity

Fuel tank / L	170
Hydraulic tank/L	76
Engine oil/L	10

Main performance

Travel speed (H/L) km/h	4.3/2.5
Swing speed r/min	11
Gradeability °	35
Ground pressure/kPa	33.5
Bucket digging force/kN	57
Arm digging force/kN	38
Max tractive force/kN	68.3
Boom offset (Left) °	/
Boom offset (Right) °	/

Hydraulic system

Main pump	Plunger pump
Rated flow L/min	160
valve pressure/MPa	28
Travel pressure/MPa	28
Swing pressure/MPa	20.6
Pilot pressure/MPa	3.5